
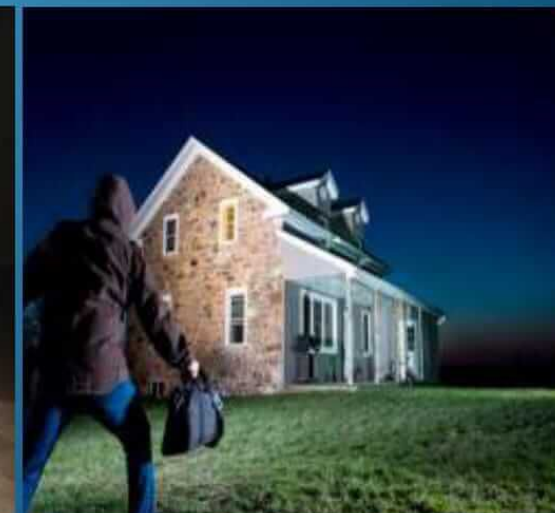
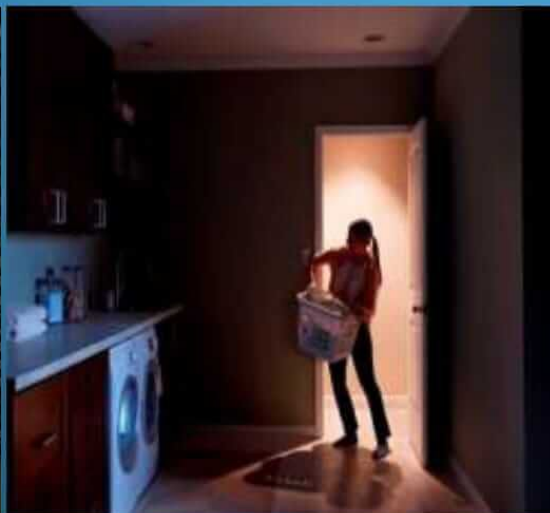


# PRIME AUTOMATION ENGINEERING

Contact: 01888 000 530

## PRIME MOTION SENSOR

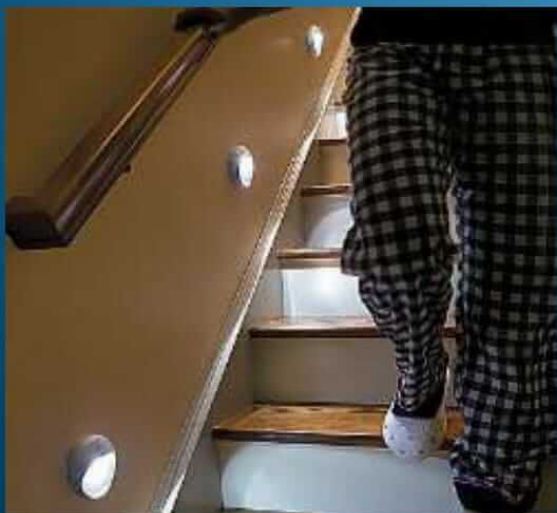

## ***SPECIFICATION:***

- Power Source: 220 -240V/AC
- Detection Range: 360°
- Power Frequency: 50Hz
- Working Temperature: -20°C~+40°C
- Ambient Light: 3-2000LUX (adjustable)
- Working Humidity: <93%RH
- Time-Delay: min: 10sec±3sec
- Installation Height: 2.2-4m Max: 7min±2min
- Power Consumption: 0.45W (work)
- Rated Load: 1200W (incandescent lamp) 300W (energy-saving lamp)
- Detection Motion Speed: 0.6 ~1.5m/s
- Detection Distance: 6m max



# Function

- **Can identify day and night:** The consumer can adjust work ambient light. It can work in the daytime and at night when it is adjusted on the “sun” position (max). It can work in the ambient light less than 3LUX when it is adjusted on the “moon” position (min). As for the adjustment pattern, please refer to the testing pattern.
- **Time-Delay is added continually:** When it receives the second induction signals after the first induction, it will compute time once more on the basic of the first time-delay rest.
- **Time-Delay** is adjustable. It can be set according to the consumer’s desire.

The minimum time is  $10\text{sec} \pm 3\text{sec}$ .

The maximum is  $7\text{min} \pm 2\text{min}$ .

